


Typical 4-6 ACH/HR  
Space - space conditions  
Satisfied by FES system

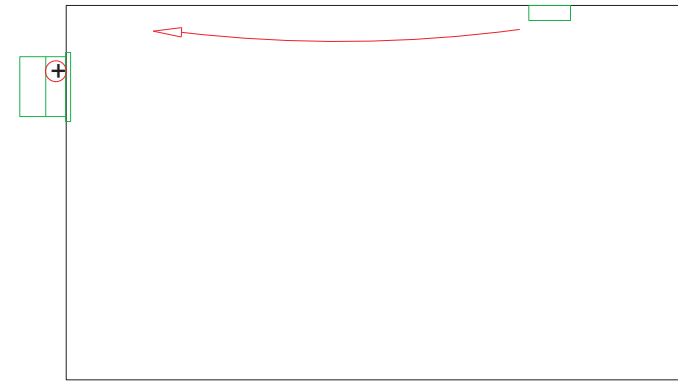

Side view

- CVR System powered constant volume regulator
- MD Motorised damper
- ⊕ Electric heater in diffuser
- OS BEMS outstation
- TD Temperature sensor and set point adjustment